

# NANOCHEM® L-Series® Purifier ByPass Module

## Features and Benefits

- Purification bypass module for all L-Series® purifiers
- Ultra-high purity applications
- Enhances process economy and improves equipment performance
- Low overall cost of ownership
- Easy to operate
- Mounting brackets included
- No power requirements
- Inlet, outlet and bypass springless diaphragm valves standard

## Specifications

- All metal parts, Type 316L stainless steel and Elgiloy® (except Kel-F® valve seats)
- Internal surface finish < 15 µin R<sub>a</sub>
- Maximum operating temperature of 40°C

## Connections

- Female inlet and male outlet 1/4" face seal fittings

## Options


- Pneumatically actuated springless diaphragm valves
- Bellows valves

## Overview

The NANOCHEM® L-Series® ByPass Module enables an L-Series® purifier to be switched in or out of the gas flow circuit without interrupting the gas stream.

The ByPass Module facilitates replacement of a depleted purifier and shortens the time required for purging.

The ByPass Module is also used during equipment start-up and maintenance, when purge gases flow from the source to the point-of use. Installation of a bypass is strongly recommended to avoid contamination and partial depletion of purifier during installation.

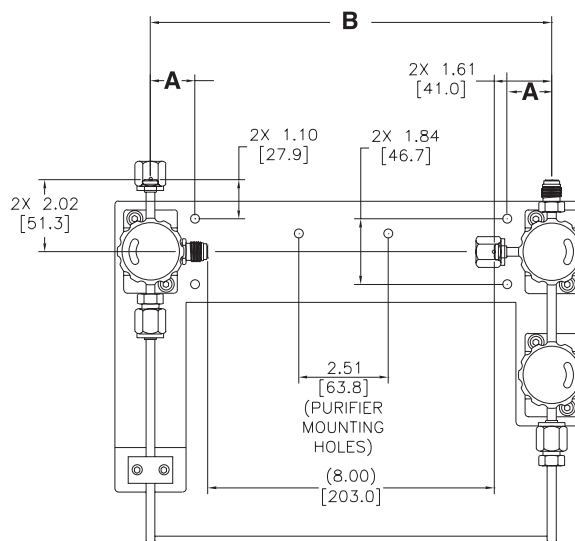

L-Series® Purifier	L-60	L-300	L-500	L-2000
<b>Dimensions inches (mm)</b>				
<b>A</b>	1.25 (31.75)	1.25 (31.75)	1.25 (31.75)	2.98 (75.69)
<b>B</b>	11.26 (286.00)	11.26 (286.00)	11.26 (286.00)	12.58 (319.53)

Specifications are subject to change.

MATHESON TRI-GAS, NANOCHEM and L-Series are registered trademarks of Matheson Tri-Gas, Inc.  
Elgiloy is a registered trademark of Elgiloy Corp.  
Kel-F is a registered trademark of 3M.  
Printed in USA PB027 R10/03



**MATHESON  
TRI-GAS**  
ask . . The Gas Professionals™

[www.ChrysalisScientific.com](http://www.ChrysalisScientific.com)

